

# FLOS

F0095009 White

## Aim Small

Designed by Ronan & Erwan Bouroullec, 2014




12W - 725lm - 2700K - CRI> 90

Suspended light fitting. Body in varnished aluminium sheet, shade in photo-etched optical polycarbonate. Internal reflector in photo-etched PC. Directionable body. Powered directly from mains. The LED can be dimmed with a «Triac for Led» dimmer approved by Flos. Flos does not respond in case of wrong electrical connection system installations. The cable has a useful length of 9 metres and thus the lamp can be suspended 3 metres from the ceiling. Multiple rose with capacity to connect up to 5 Aim Small also available.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

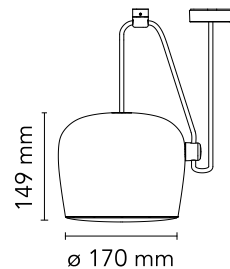

### Main specifications

EAN	8059607013502
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
LED type	LED Module
Power (W)	12
System flux (lm)	725

### Physical

Colour	White
Cord length (mm)	9000
Net weight (kg)	1.35
Package height (mm)	310
Package width (mm)	300
Package length (mm)	300
Package volume (m3)	0.03
IP internal	20

### Download

<a href="#">Mounting instructions</a>	↓ PDF
<a href="#">Compatible dimmers</a>	↓ PDF
<a href="#">Spare Parts</a>	↓ PDF

### Photometric Files


<a href="#">LDT / IES</a>	↓ LDT
---------------------------	-------

### Technical Drawings

<a href="#">2D</a>	↓ ZIP
<a href="#">3D</a>	↓ ZIP
<a href="#">Bim</a>	↓ ZIP



## Schematic light drawing



## Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F



Replaceable (LED only)  
light source by a  
professional


## Photometric

Lighting type	Direct
Light distribution	Roto symmetric
CCT (K)	2700
CRI>	90

## Electrical

Insulation class	II
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
LED voltage Vf (Vdc)	null
Driver	Integrated
Dimmable	Yes
Dimming type	Mains Cut Dimming
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No
Charging min time	No

## Spare Parts

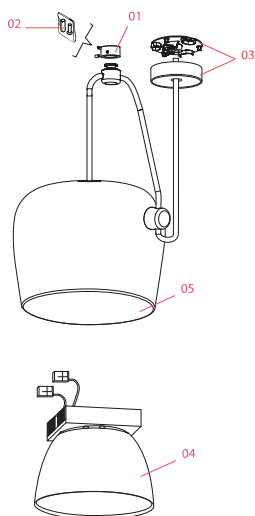

**DOWNLOAD**