


FLOS

 F4640019 Yellow

OK

Designed by Konstantin Grcic, 2014


18W - 1551lm - 2700K



Lamp providing direct light. Head in gloss varnished. Body in injection-stamped PA66+30%FV with cover in gloss varnished. Orientable head. The light fitting can be moved vertically by running the internal structure of the body on a steel cable tensioned between the ceiling and the floor (useful length 4000mm). Dimmable switch with Soft Touch technology. Adaptor on plug connector with interchangeable plugs.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

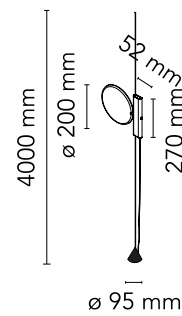

Main specifications

EAN	8059607020128
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
LED type	LED Module
Power (W)	18
System flux (lm)	1551

Physical

Colour	Yellow
Cord length (mm)	4000
Net weight (kg)	2.9
Package height (mm)	140
Package width (mm)	340
Package length (mm)	390
Package volume (m3)	0.02
IP internal	20

Download

Mounting instructions	↓ PDF
Mounting instructions	↓ PDF
Spare Parts	↓ PDF

Photometric Files


LDT / IES	↓ LDT
-----------	-----------------------

Technical Drawings

2D	↓ ZIP
3D	↓ ZIP



Schematic light drawing



Beam Angle: 61°

h(m)	E(lx)	D(m)
1	1158	1.19
2	289	2.38
3	129	3.57
4	72	4.76
5	46	5.95

Luminous flux Luminaire
1551 lm

Photometric


Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700

Electrical


Insulation class	III
Frequency (Hz)	50/60
Main voltage (Vac)	100-240/24
LED voltage Vf (Vdc)	null
Driver	Remote included
Dimmable	Yes
Dimming type	Electronic 24V
Dimming interface	Dimmer Integrated
Plug type	Type G, Type A, Type C
Batteries inside	No
Charging min time	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F




Replaceable (LED only)
light source by a
professional



Replaceable control
gear by an end-user

Spare Parts

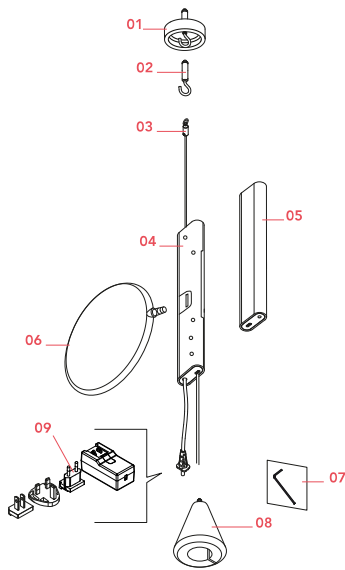

01.	Yellow ceiling rose	RF23031
02.	Anchor with hook	RF4640100
03.	Steel cable 6mt.	RF4640200
03.	Steel cable 6mt.	RF4640300
04.	Internal lamp body assembly	RF4640400
05.	Yellow extrusion	RF22997
06.	Yellow led head assembly	RF28255
07.	Hex Key 2mm for OK lamp	RF06850
08.	Counterweight	RF23023
09.	Black plug assembly kit & 24V driver	RF3320100

DOWNLOAD



RF23031
Yellow ceiling rose



RF4640100
Anchor with hook



RF4640200
Steel cable 6mt.



RF4640300
Steel cable 6mt.



RF4640400
Internal lamp body assembly



RF22997
Yellow extrusion



RF28255
Yellow led head assembly



RF06850
Hex Key 2mm for OK lamp



RF23023

Counterweight



RF3320100

Black plug assembly kit & 24V driver