

FLOS

■ F6640030 Black

Sawaru

Designed by Nendo, 2018


45W



A light consisting of two independent cylinders touching each other in a perpendicular direction. One plays the role of a light source, while the other acts as a base. Its projection angle can be adjusted in three stages of 25, 40 or 60 degrees, by inserting the pin attached to the base. Various functions are made possible by doing away with excess elements and creating a simple form. Base and body in extruded aluminium with painted or galvanized finish. Diffuser in photo-etched injection-moulded polycarbonate. Reflector in painted die-cast aluminium. Dimmer function and channel mixing via a pedal switch on the cord. Corded power supply with interchangeable plugs.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



Main specifications

EAN	8059607007112
Mounting	Floor
Environments	Indoor dry location
Light Source Type	LED
LED type	LED Module
Power (W)	45

Physical

Colour	Black
Length (mm)	430
Cord length (mm)	2500
Net weight (kg)	4.5
Package volume (m3)	0.06
IP internal	20

Download

Mounting instructions	↓ PDF
Mounting instructions	↓ PDF
Spare Parts	↓ PDF




Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F



Replaceable (LED only) light source by a professional



Replaceable control gear by an end-user

Photometric


Lighting type	Indirect
Light distribution	Symmetric

Electrical

Insulation class	III
Frequency (Hz)	50/60
Main voltage (Vac)	100-240/48
LED voltage Vf (Vdc)	null
Driver	Remote included
Dimmable	Yes
Dimming type	Electronic 48V
Dimming interface	Dimmer Integrated
Plug type	Type G, Type A, Type C
Batteries inside	No
Charging min time	No

Spare Parts

- | | | |
|-----|--------------------------------------|-----------|
| 01. | Black plug assembly kit & 48V driver | RF3320400 |
| 02. | Black base | RF6640200 |

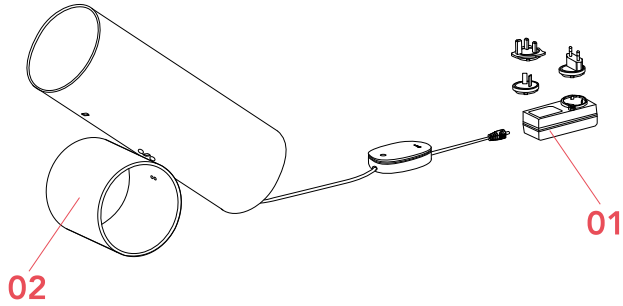

DOWNLOAD



RF3320400
Black plug assembly kit & 48V
driver



RF6640200
Black base