

# FLOS

■ F6564031 Dark Green

## Tab Floor

Designed by Edward Barber and Jay Osgerby, 2011



9W - 347lm - 2700K - CRI> 90

Floor luminaire providing direct lighting with adjustable head. Body in painted pressofused aluminium. Multi-led diffuser in specially designed PMMA to avoid the Multi Shadow effect and dazzle. Head rotation  $\pm 90^\circ$ .

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

### Main specifications

|                   |                     |
|-------------------|---------------------|
| EAN               | 8059607006580       |
| Mounting          | Floor               |
| Environments      | Indoor dry location |
| Light Source Type | LED                 |
| LED type          | LED Module          |
| Power (W)         | 9                   |
| System flux (lm)  | 347                 |

### Physical

|                     |            |
|---------------------|------------|
| Colour              | Dark Green |
| Net weight (kg)     | 1.9        |
| Package volume (m3) | 0.06       |
| IP internal         | 20         |

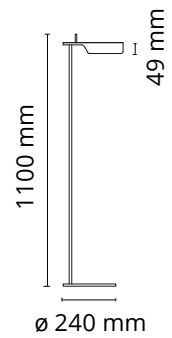

### Download

|                                       |                       |
|---------------------------------------|-----------------------|
| <a href="#">Mounting instructions</a> | <a href="#">↓ PDF</a> |
| <a href="#">Mounting instructions</a> | <a href="#">↓ PDF</a> |
| <a href="#">Spare Parts</a>           | <a href="#">↓ PDF</a> |

### Photometric Files


|                           |                       |
|---------------------------|-----------------------|
| <a href="#">LDT / IES</a> | <a href="#">↓ LDT</a> |
|---------------------------|-----------------------|

### Technical Drawings

|                    |                       |
|--------------------|-----------------------|
| <a href="#">2D</a> | <a href="#">↓ ZIP</a> |
| <a href="#">3D</a> | <a href="#">↓ ZIP</a> |



## Schematic light drawing



## Photometric


|                    |            |
|--------------------|------------|
| Lighting type      | Direct     |
| Light distribution | Asymmetric |
| CCT (K)            | 2700       |
| CRI>               | 90         |

## Electrical


|                      |                                  |
|----------------------|----------------------------------|
| Insulation class     | III                              |
| Frequency (Hz)       | 50/60                            |
| Main voltage (Vac)   | 100-240/24                       |
| LED voltage Vf (Vdc) | null                             |
| Driver               | Remote included                  |
| Dimmable             | No                               |
| Dimming type         | Electronic 24V                   |
| Dimming interface    | Switch Integrated (Not Dimmable) |
| Plug type            | Type G, Type A, Type C           |
| Batteries inside     | No                               |

## Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class D




Replaceable (LED only) light source by a professional



Replaceable control gear by an end-user

## Spare Parts

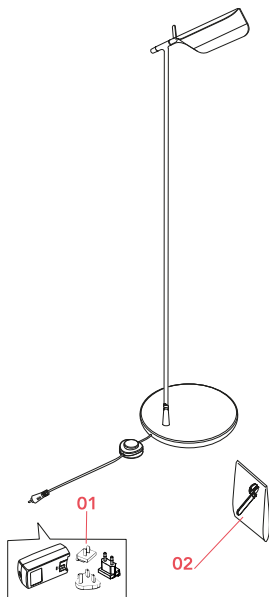

01. Black plug assembly kit & 24V driver RF3320100

02. Locking key tool RF13905

**DOWNLOAD**



RF3320100  
Black plug assembly kit & 24V  
driver



RF13905  
Locking key tool  
driver