

FLOS



F9513030 Grey Cable/Black Ring

Wirering Grey

Designed by Formafantasma, 2018


16W - 712lm - 2700K - CRI> 90



Indirect light wall lighting device with body in calendered, extruded aluminium with galvanised or varnished finish. The special tangent cable, in coloured rubber, provides the power. The cable is fixed to the wall with ABS joints in the same finish as the ring. Dimming via switch pedal on the cable. Power supply on adapter with interchangeable plugs. Useful cable length is 2.5 metres.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

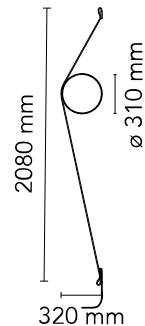

Main specifications

| | |
|-------------------|---------------------|
| EAN | 8059607007693 |
| Mounting | Wall |
| Environments | Indoor dry location |
| Light Source Type | LED |
| LED type | LED Module |
| Power (W) | 16 |
| System flux (lm) | 712 |

Physical


| | |
|---------------------|-----------------------|
| Colour | Grey Cable/Black Ring |
| Length (mm) | 317 |
| Cord length (mm) | 2500 |
| Net weight (kg) | 0.95 |
| Package volume (m3) | 0.02 |
| IP internal | 20 |

Download

[Mounting instructions](#)  PDF

[Spare Parts](#)  PDF

Photometric Files

[LDT / IES](#)  LDT


Technical Drawings

[2D](#)  ZIP

[3D](#)  ZIP



Schematic light drawing



Photometric

| | |
|--------------------|------------|
| Lighting type | Indirect |
| Light distribution | Asymmetric |
| CCT (K) | 2700 |
| CRI> | 90 |

Electrical

| | |
|--------------------|------------------------|
| Insulation class | III |
| Frequency (Hz) | 50/60 |
| Main voltage (Vac) | 100-240/24 |
| Driver | Remote included |
| Dimmable | Yes |
| Dimming type | Electronic 24V |
| Dimming interface | Dimmer Integrated |
| Plug type | Type G, Type A, Type C |
| Batteries inside | No |
| Charging min time | No |

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F




Replaceable (LED only) light source by a professional



Replaceable control gear by an end-user

Spare Parts

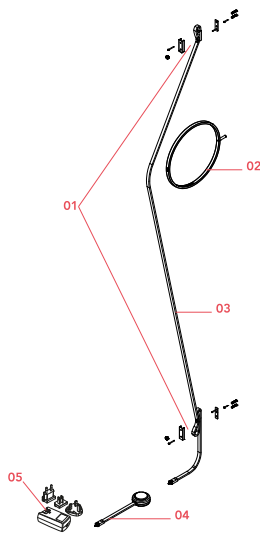

- | | | |
|-----|--|-----------|
| 01. | Kit with screws, nuts and components | RF9510500 |
| 02. | Ring assembly | RF26678 |
| 03. | Electrical mounting body assembly | RF26649 |
| 04. | Electrical mounting assembly with dimmer | RF26645 |
| 05. | Black plug assembly kit & 24V driver | RF3320100 |

DOWNLOAD



RF9510500
Kit with screws, nuts and components



RF26678
Ring assembly



RF26649
Electrical mounting body assembly



RF26645
Electrical mounting assembly with dimmer



RF3320100
Black plug assembly kit & 24V driver