


Calipso suspension 2700K - App Compatible

Neil Poulton



IP20    Regulable: 

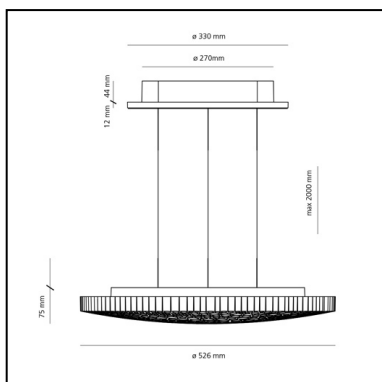

LUMINARIA

- Potencia (W): **55W**
- Tensión de alimentación: **220-240V**
- Flujo Luminoso (lm): **2884lm**
- CCT: **2700K**
- Efficiency: **56%**
- Efficacy: **52.43lm/W**
- CRI: **90**
- Dimmable Typology: **Push & APP**

Notas

The APP driver can not be controlled by DALI dimming system and viceversa.

ESPECIFICACIONES

The unique honeycomb grill of Calipso was generated by feeding a photo of the moon into an image-based algorithm found on a seemingly extinct computer. The resulting fractal shape, an impure geometry that displays the irregular beauty of nature, is built from an organic honeycomb of different diameter tubes, seemingly arranged in a random geometry. This honeycomb characterizes the lamp both aesthetically and optically - not only is it visually pleasing, but it also provides an even and comfortable light emission. The result is a highly emotional lighting object that joins together optical and aesthetic intelligence. A product positioned perfectly half-way between home and professional use, Calipso is suited to a variety of applications - expressing Artemide's traditional approach to deliver high performance lighting with a unique and emotional expressiveness.

CÓDIGO PRODUCTO: 0213W10APP

CARACTERÍSTICAS

- Código del artículo: **0213W10APP**
- Color: **White**
- Instalación: **Suspensión**
- Material: **Tecnopolymer**
- Serie: **Design Collection, Architectural Indoor**
- Entorno de uso: **Interior**
- Emisión: **Direct**
- diseño: **Neil Poulton**

DIMENSIONES

- Ancho: **cm 7.5**
- Diámetro: **cm 52.6**
- Diámetro base: **cm 27**
- Altura máxima del techo: **cm 200**
- Prueba calorífica: **650°**

FUENTES DE LUZ INCLUIDAS

- Categoría: **Led**
- Numero: **4**
- Potencia (W): **10.8W**
- Flujo Luminoso (lm): **1214lm**
- Temperatura de Color (K): **2700K**
- CRI: **90**
- Color Tolerance: **MacAdam 3SDCM**
- Efficacy: **112lm/W**
- Service Life: **50000-L70**

ACCESORIOS

Device for switching and controlling Artemide App products. Max N.3 inputs for external push buttons. Max 1m distance. Mains power supply required. To be installed inside flush mounting boxes or junction boxes. DV1080APP