

# FLOS

F1032009 White

## Bon Jour

Designed by Philippe Starck, 2015



13W - 811lm - 2700K - CRI> 90

Table lamp providing diffuse light. Injection moulded PMMA clear transparent base and diffuser. Edge Lighting technology light source. Power cord length 200 cm, with dimmer switch that provide ON-OFF functions and 10-100% light adjustment. Plug-in power supply with interchangeable plugs.

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

### Main specifications

EAN	8059607001141
Mounting	Table
Environments	Indoor dry location
Light Source Type	LED
LED type	LED Module
Power (W)	13
System flux (lm)	811

### Physical

Colour	White
Cord length (mm)	2350
Net weight (kg)	1.65
Package volume (m3)	0.07
IP internal	20

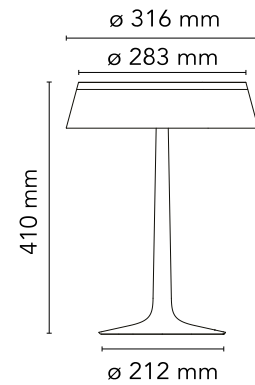

### Download

<a href="#">Mounting instructions</a>	<a href="#">↓ PDF</a>
<a href="#">Mounting instructions</a>	<a href="#">↓ PDF</a>
<a href="#">Spare Parts</a>	<a href="#">↓ PDF</a>

### Photometric Files


<a href="#">LDT / IES</a>	<a href="#">↓ ZIP</a>
---------------------------	-----------------------

### Technical Drawings

<a href="#">2D</a>	<a href="#">↓ ZIP</a>
<a href="#">3D</a>	<a href="#">↓ ZIP</a>



## Schematic light drawing



## Photometric

Lighting type	Direct
Light distribution	Roto symmetric
CCT (K)	2700
CRI>	90

## Electrical

Insulation class	III
Frequency (Hz)	50/60
Main voltage (Vac)	100-240/24
LED voltage Vf (Vdc)	null
Driver	Remote included
Dimmable	Yes
Dimming type	Electronic 24V
Dimming interface	Dimmer Integrated
Plug type	Type G, Type A, Type C
Batteries inside	No
Charging min time	No

## Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E



Replaceable (LED only)  
light source by a  
professional



Replaceable control  
gear by an end-user

## Accessories & Power Supply



OPTIONAL

F1033000

Bon Jour Crown



OPTIONAL

F1033007

Bon Jour Crown



OPTIONAL

F1033019

Bon Jour Crown



OPTIONAL

F1033030

Bon Jour Crown



OPTIONAL

F1033070

Bon Jour Crown




OPTIONAL

F1033088

Bon Jour Crown

## Spare Parts

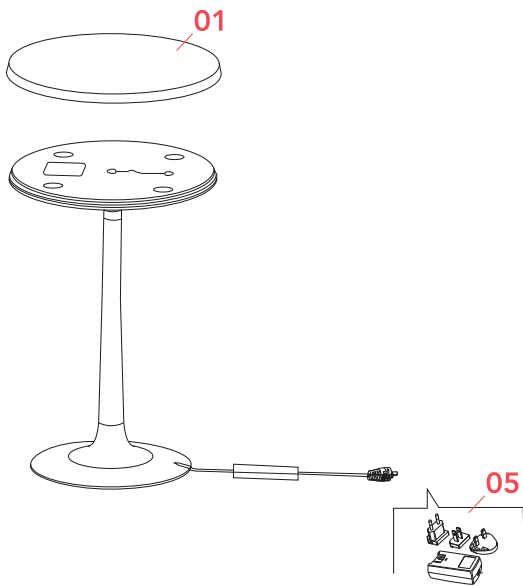

- |     |                                      |           |
|-----|--------------------------------------|-----------|
| 01. | Top cover white assembly             | F1031009  |
| 05. | White plug assembly kit & 24V driver | RF3320200 |

**DOWNLOAD**



F1031009

Top cover white assembly



RF3320200

White plug assembly kit & 24V driver