

FLOS

F1883033 Argent


Coordinates Module Ceiling

Designed by Michael Anastassiades, 2020



180W - 10230lm - 2700K - CRI> 90

Coordinates is a lighting system with diffuse light composed of horizontal and vertical luminaires arranged in a bright grid of various shapes and complexities. Each element is made of extruded anodized aluminium with a champagne finish and a diffuser in platinum optical silicone with an integrated LED strip (CRI 95). Each element is powered and supported by an invisible electrical and mechanical connection designed specifically to allow for the composition of the 3 ceiling models (C1 – C2 – C4), which may be combined with the respective Long versions for the highest ceilings (C1 Long, C2 Long, C4 Long). The 'C Module' is also available. Its geometry was designed to be repeated to create large grids for custom installations. Each Coordinates configuration includes its own ceiling rose, whose integrated electronics allow for the use of different dimmer systems: push, 1-10, DALI. In the absence of these systems, the amount of light can be set during installation with the push system included in the rose. The related CI III version is also available for each configuration for installations with a remote power supply.

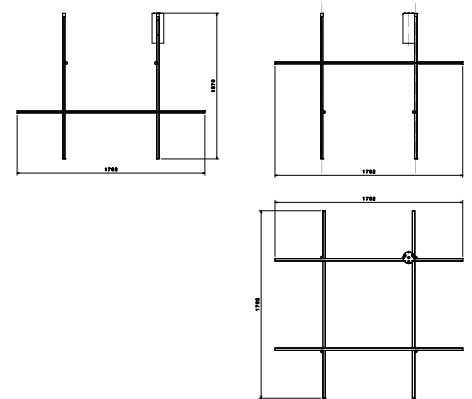

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

| | |
|-------------------|---------------------|
| EAN | 8059607032831 |
| Mounting | Ceiling |
| Environments | Indoor dry location |
| Light Source Type | LED |
| LED type | LED Module |
| Power (W) | 180 |
| System flux (lm) | 10230 |

Physical

| | |
|---------------------|--------|
| Colour | Argent |
| Length (mm) | 1762 |
| Net weight (kg) | 8.9 |
| Package volume (m3) | 0.07 |
| IP internal | 20 |

Download

Mounting instructions [↓ PDF](#)

Photometric Files

ULD [↓ ZIP](#)

Technical Drawings

3D [↓ ZIP](#)

[Bim](#) [↓ ZIP](#)



Photometric

| | |
|--------------------|------------|
| Lighting type | Total |
| Light distribution | Asymmetric |
| CCT (K) | 2700 |
| CRI> | 90 |

Electrical

| | |
|--------------------|---|
| Insulation class | I |
| Frequency (Hz) | 50/60 |
| Main voltage (Vac) | 100-240 |
| Driver | Integrated |
| Dimmable | Yes |
| Dimming type | Dimmable 0-10V, Dimmable Push, Dimmable 1-10V, Dimmable DALI 1 |
| Dimming interface | Remote Dimmable (Dimmer Not Included) |
| Batteries inside | No |

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F



Replaceable (LED only) light source by a professional



Replaceable control gear by a professional